

FIG 1

09733086.22400

- (a) IPShuttle <-----> IPRelay <-----> PBX/KTS
call dial tone
established
- (b) IPShuttle <-----> IPRelay <-----> PBX/KTS
press hookflash
and then #
- (c) IPShuttle -----> IPRelay <-----> PBX/KTS
control message
via audio channel
- (d) IPShuttle <-----> IPRelay -----> PBX/KTS
hookflash
- hookflash = onhook for 200ms and then offhook again
- (e) IPShuttle -----> IPRelay -----> PBX/KTS
user enters
PBX/KTS access codes

FIG 2

09739132-122500

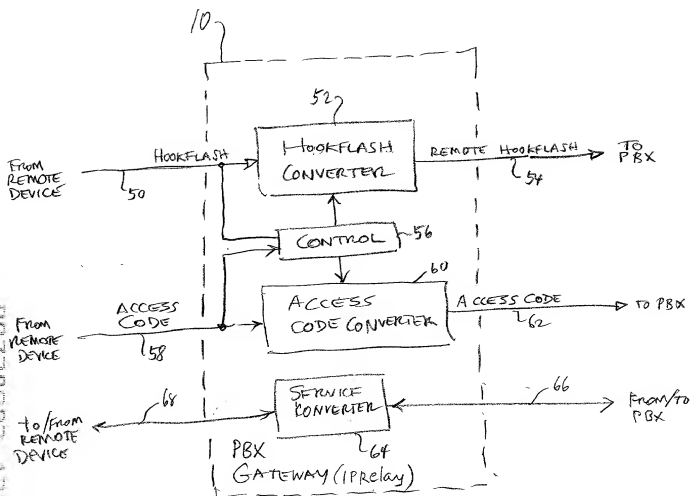


FIG 3